



//MAIN FEATURES


//DESIGN FEATURES

- Light output range: 78,000 fixture lumens
- Light Distribution: Forward Cut – Off Asymmetric Wide
- IP Rating: IP66
- CRI: 80 CRI
- Colour Temp: 4,000K (5,000K available)
- Body Type: High Pressure cast aluminium, powder coated grey
- Lens Type: Tempered Glass
- Thermal Rating: - 30° to + 55°
- Warranty: 5 Years
- Weight: 28 kg
- Life: 50,000 hrs


- 130 Lumens / Watt
- 80 CRI
- 3,000K, 4000K, 5,000K options
- Asymmetrical forward throw Cut-Off
- No infrared and No ultra-violet radiation
- Low heat radiation
- Long life time L70 = 50,000 hours

//PHOTOMETRIC DISTRIBUTION CURVE

//FITTING DIMENSIONS

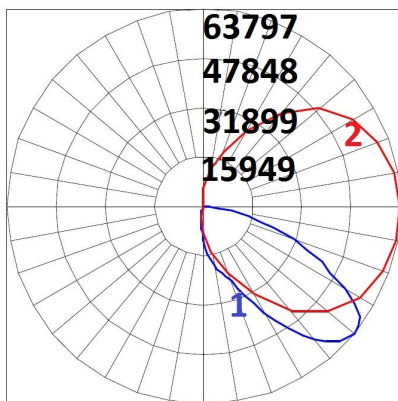

1. C 0° - C 180°

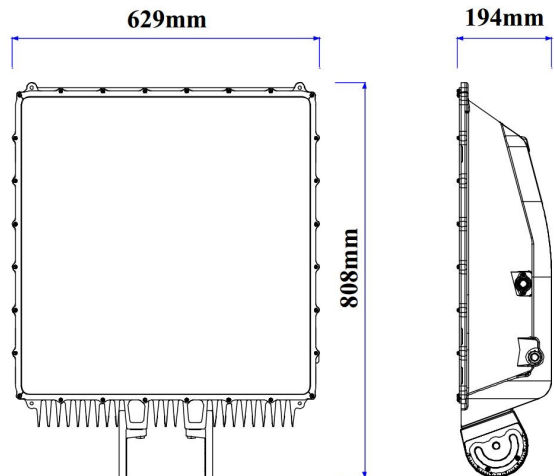

MODEL	FIXTURE LUMENS	MOUNT*	CT KELVIN	CRI	GEAR Integral or Remote	WATTAGE (W)	LIGHT DISTRIBUTION *	ORDERING CODE
Stealth-Flood	78,000	T	4	80	I	600	AW	SF78T480I600AW

* Trunnion Arm mount

* Available Light Distribution AW = Asymmetric Wide

**Contact Details:**

Cnr. Norfolk Road & Wentworth Street,
Greenacre, NSW. 2190. Australia.

Email: sales@lighttc.com.au
WEB: www.lighttc.com.au